6. Exploded View & Parts List

6-1 CS15K5SX/XSG

You can search for the updated part code through ITSELF web site.
URL : http://itself.sec.samsung.co.kr

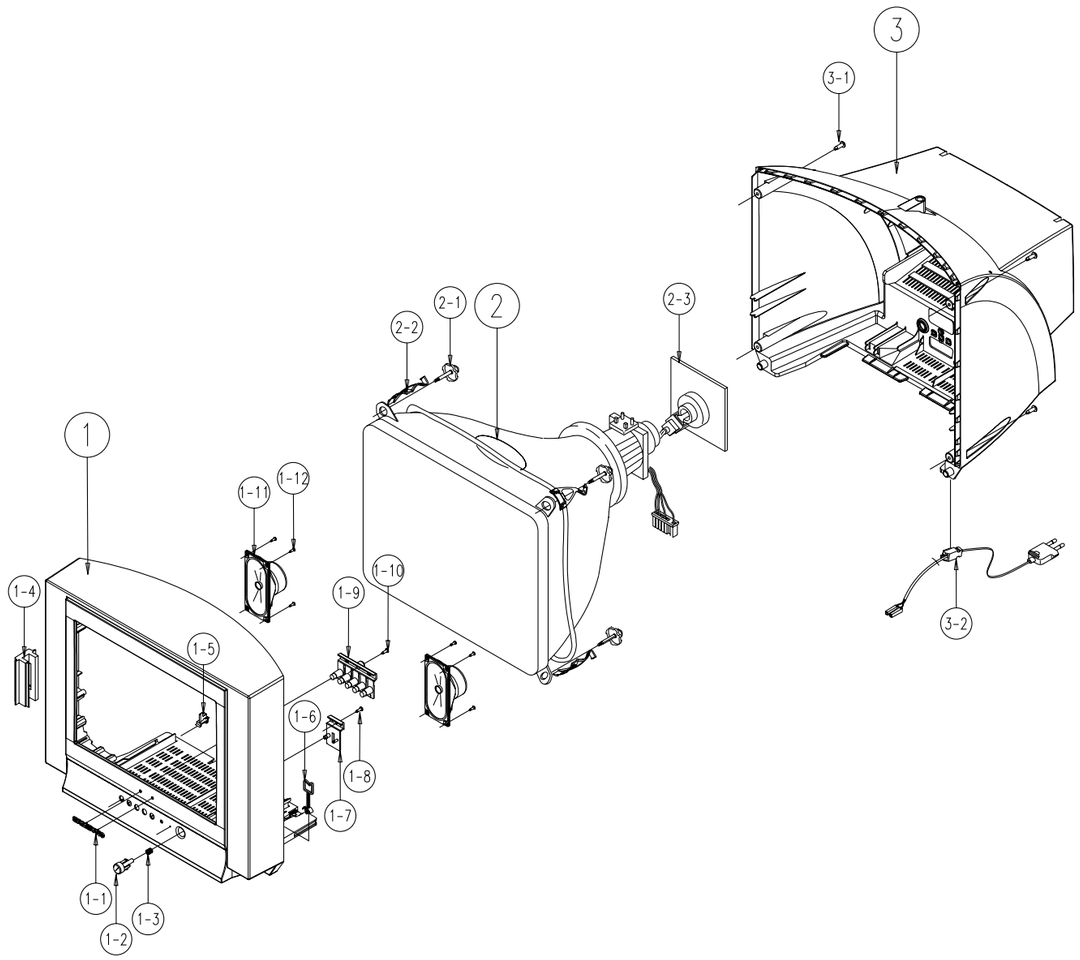

No	Code No	Description	Specification	Q'ty	Remark	S.N.A
1	AA96-00912C	ASSY COVER P-FRONT;15K5,M-EAST,HIPS HB,G		1		
1*	AA64-02627B	CABINET-FRONT;15K5,HIPS,HB,G4309,SV012P		1		
1-1	AA64-70127A	BADGE-BRAND;-,AL,-,-,L=40,SAMSUNG,SILVER		1		S.N.A
1-2	AA64-02631A	KNOB-POWER;15K5,ABS HB,G3676,SVM-3012		1		
1-3	AA61-60003J	SPRING ETC-CS;-,SUS304,-,-,OD6,N7,OD6,-,		1	KNOPOW	S.N.A
1-4	AA94-08415A	ASSY PCB MISC-PCB A/V SIDE;15K5,KS1A A2		1		
1-5	AA61-40113A	STOPPER-PCB;501H,HIPS,-,-,HB,NTR,-		1		S.N.A
1-6	AA65-00011C	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,		1		S.N.A
1-7	AA64-02632A	WINDOW-RMC,LED;29K5,PC,CLR		1		
1-8	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR		1	WR+CF	S.N.A
1-9	AA64-02635A	KNOB-CONTROL;29K5,ABS HB,G3676,SVM-3012		1		
1-10	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR		1		KC+CF
1-11	AA96-10137B	ASSY SPEAKER;-,8OHM,3W,3001-001020,AA39-		1		S.N.A
1-12	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR		8	SPK+CF	
2	AA91-02249A	ASSY CPT;CS15K8SX/XSG		1		S.N.A
2-1	AA65-30107A	CLAMPER CORE-D,COIL;20~22 INCH,NYLON 66,		2	D-COIL	S.N.A
2-2	AA60-10050R	SCREW-ASSY;-,SWRCH18A,M5,L31.5,HH,+,WC,-		4	CRT+CF	S.N.A
2-3	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,NI,-		1	V999S	
3	AA64-02628B	CABINET-BACK;15K5,HIPS,HB,G4309		1		
3-1	AA60-10050T	SCREW-TAPPING;-,SWRCH18A,M4,L20,RH,+,2S,		4	CB+CF	S.N.A
3-2	AA96-20109B	ASSY POWER CORD;-,CP2/NO(4.0),H/C250,KKP		1		S.N.A

6-2 CS14F3X/MDK

You can search for the updated part code through ITSELF web site.
URL : http://itself.sec.samsung.co.kr

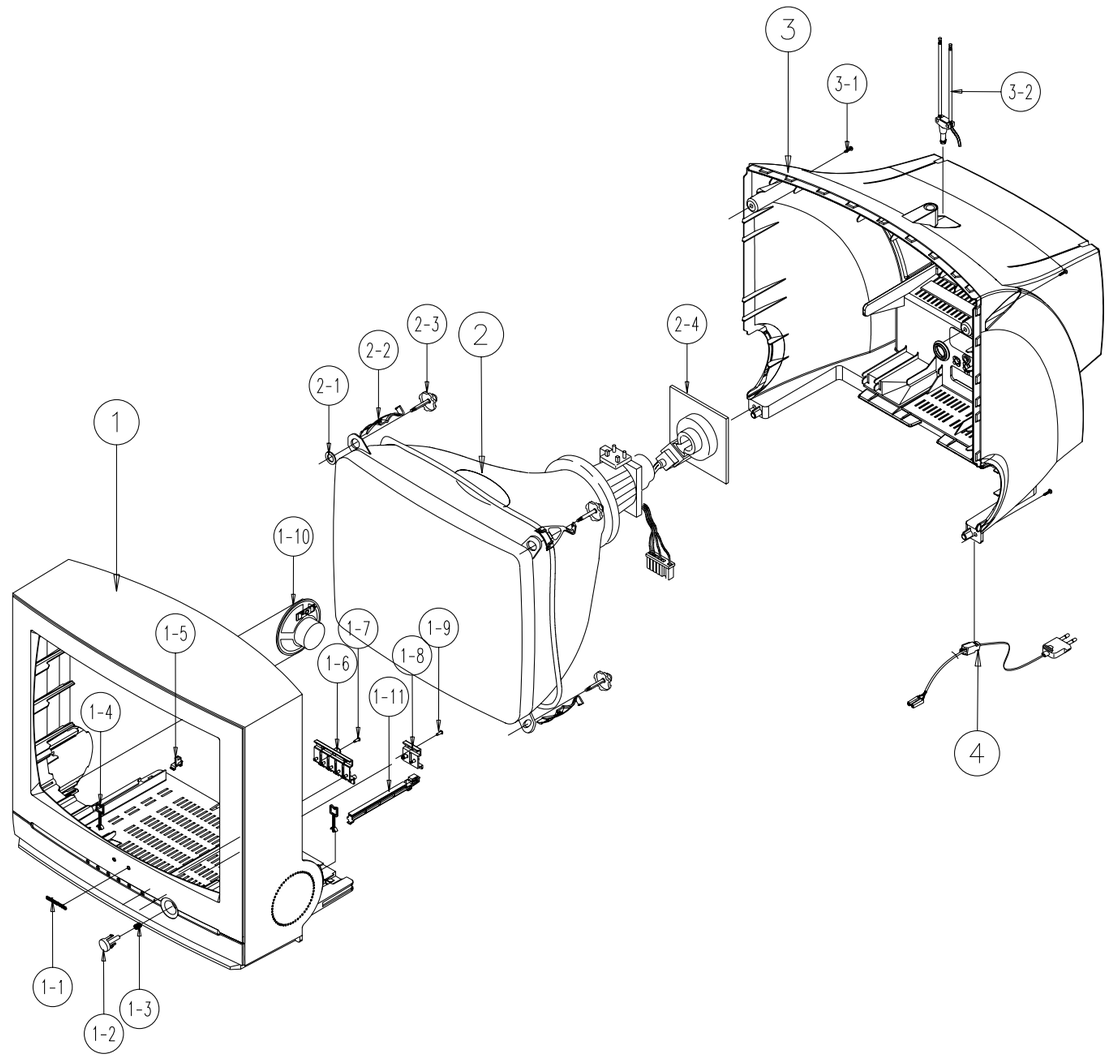

No	Code No	Description	Specification	Q'ty	Remark	S.N.A
1	AA96-01029D	ASSY COVER P-FRONT;14F3,HIPS HB,G4309,SV		1		
1*	AA64-03003C	CABINET-FRONT;14F3,HIPS,HB,G4309,SV012P		1		
1-1	AA64-70127F	BADGE-BRAND;NEW,AL,-,-,L40,R800,SILVER,S		1		
1-2	AA64-03008A	KNOB-POWER;14F3,ABS,HB,G3676,SVM-3012		1		
1-3	AA61-60003J	SPRING ETC-CS;-,SUS304,-,-,OD6,N7,OD6,-,		1		
1-4	AA65-30105A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,		1		
1-5	AA61-40113A	STOPPER-PCB;501H,HIPS,-,-,HB,NTR,-		1		
1-6	AA64-03007A	KNOB-CONTROL;14F3,ABS,HB,G3676,SVM-3012		1		
1-7	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR		1	KC+CF	
1-8	AA64-03012A	WINDOW-RMC,LED;14F3,PC,CLR		1		
1-9	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR		1	WIN+CF	
1-10	AA96-01522A	ASSY SPEAKER P;16ohm,3001-001015,AA39-20		1		
1-11	AA61-00721A	HOLDER-RAIL;H4,HIPS,FV2,GR503,D1		1		
2	AA91-02467A	ASSY CPT;CS14F2X/BWT		1		
2-1	AA65-30106A	CLAMPER CORE-D,COIL;14 INCH,NYLON 66,V2,		2		
2-2	3704-001089	SOCKET-CRT;7P,22.5PI,12PI,SN,-		1	V999S	
2-3	AA60-10050R	SCREW-ASSY;-,SWRCH18A,M5,L31.5,HH,+,WC,-		4	CRT+CF	
3	AA64-03004A	CABINET-BACK;14F3,HIPS,FV2,G4309		1		
3-1	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR		4	CB+CF	
3-2	AA42-00003A	ANT ROD;-,3S,720mm,ABS,UL/CSA,-		1	-	
4	AA96-20109B	ASSY POWER CORD;-,CP2/NO(4.0),H/C250,KKP		1		

6-3 CS20H2ZX/STC

You can search for the updated part code through ITSELF web site.
URL : http://itself.sec.samsung.co.kr

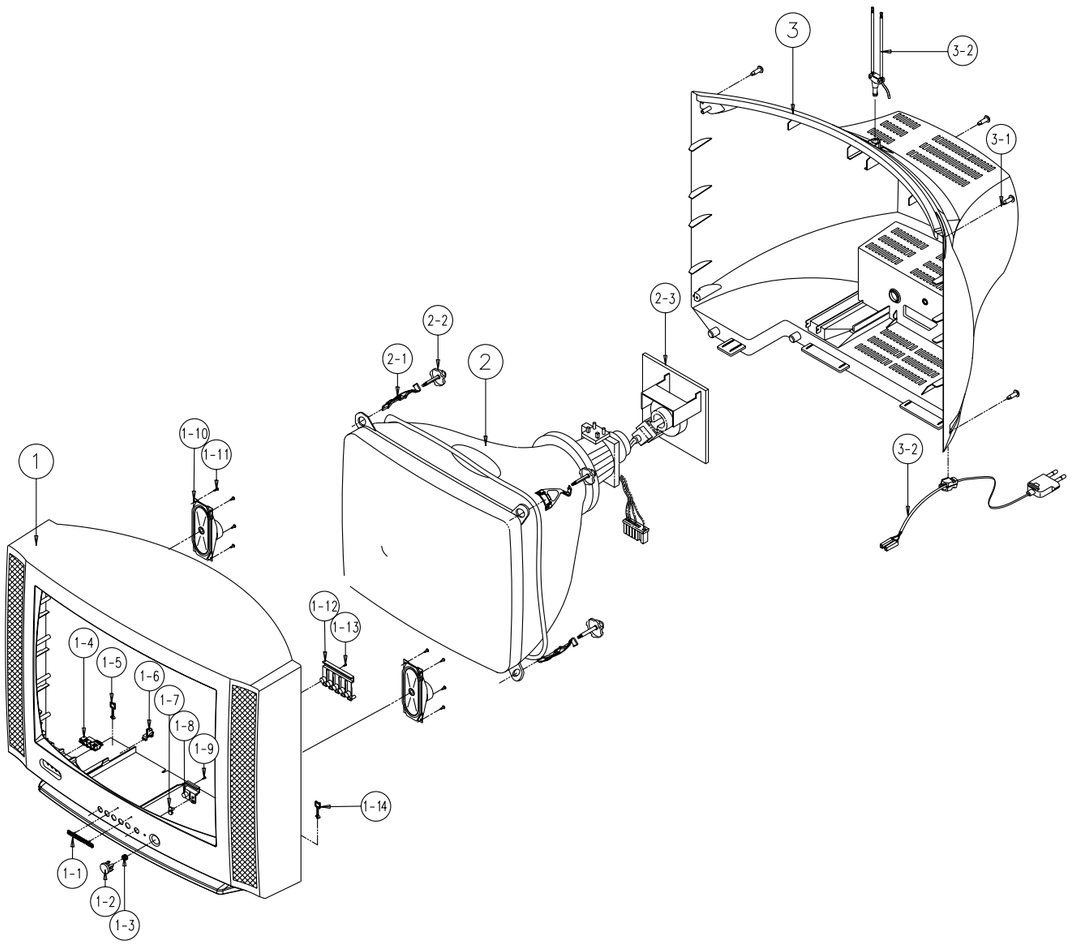

No	Code No	Description	Specification	Q'ty	Remark	S.N.A
1	AA96-00904C	ASSY COVER P-FRONT;20H2,CS20H2ZX/STC,HIP		1		
1*	AA64-01028A	CABINET FRONT;20D8,-,-,-,-,-,-,MOLD		1		
1-1	AA64-70010D	BADGE-BRAND;-,AL,-,-,L50,-,GOLD,SS R2000		1		
1-2	AA64-01030B	KNOB POWER;20D8,ABS,-,-,-,HB,BLK,-,NO-SI		1		
1-3	AA61-60003J	SPRING ETC-CS;-,SUS304,-,-,OD6,N7,OD6,-,		1		
1-4	AA95-01724A	ASSY SUB-A/V,FRONT;S4,KS1A,MONO,AA95-014		1		
1-5	6006-001095	SCREW-ASS'Y TAPT;WP,BH,+,M4,L12,ZPC(YEL)		2	PA+CF	
1-6	AA65-30105A	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,		1		S.N.A
1-7	AA61-40113A	STOPPER-PCB;501H,HIPS,-,-,HB,NTR,-		1		
1-8	AA64-01032B	INDICATOR LED;20D8,ACRYL,-,CLR,-,-,-		1		
1-9	AA64-01031B	WINDOW REMOCON;20D8,PC,-,-,-,VO,VIOLET,-		1		
1-10	6002-000514	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(BLK),SWR		1	WIN+CF	
1-11	AA64-01033B	KNOB CONTROL;20D8,ABS,-,-,-,HB,BLK,-,-		1		
1-12	6002-000514	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(BLK),SWR		1	CB+RCA	
1-13	AA96-00281A	ASSY SPEAKER;-,8ohm,6W,001034,20503B,4P5		2		
1-14	6002-000514	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(BLK),SWR		8	SPK+CF	
2	AA91-04028A	ASSY CPT;CS20H2X/SMA,MALAYSIA,0MG		1		
2-1	AA65-30107A	CLAMPER CORE-D,COIL;20~22 INCH,NYLON 66,		4		
2-2	AA60-10050R	SCREW-ASSY;-,SWRCH18A,M5,L31.5,HH,+,WC,-		4	CRT+CF	
2-3	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,NI,-		1	V999S	
3	AA64-01029A	CABINET BACK;20D8,-,-,-,-,-,-,MOLD		1		
3-1	6002-000514	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(BLK),SWR		4	CB+CF	
3-2	AA42-00003A	ANT ROD;-,3S,720mm,ABS,UL/CSA,-		1		
3-3	AA96-00697A	ASSY POWER CORD;,KKP419C,CP2/NO(4.0),H/C		1		

6-4 CZ20H42ZSXXEH

You can search for the updated part code through ITSELF web site.
URL : http://itself.sec.samsung.co.kr

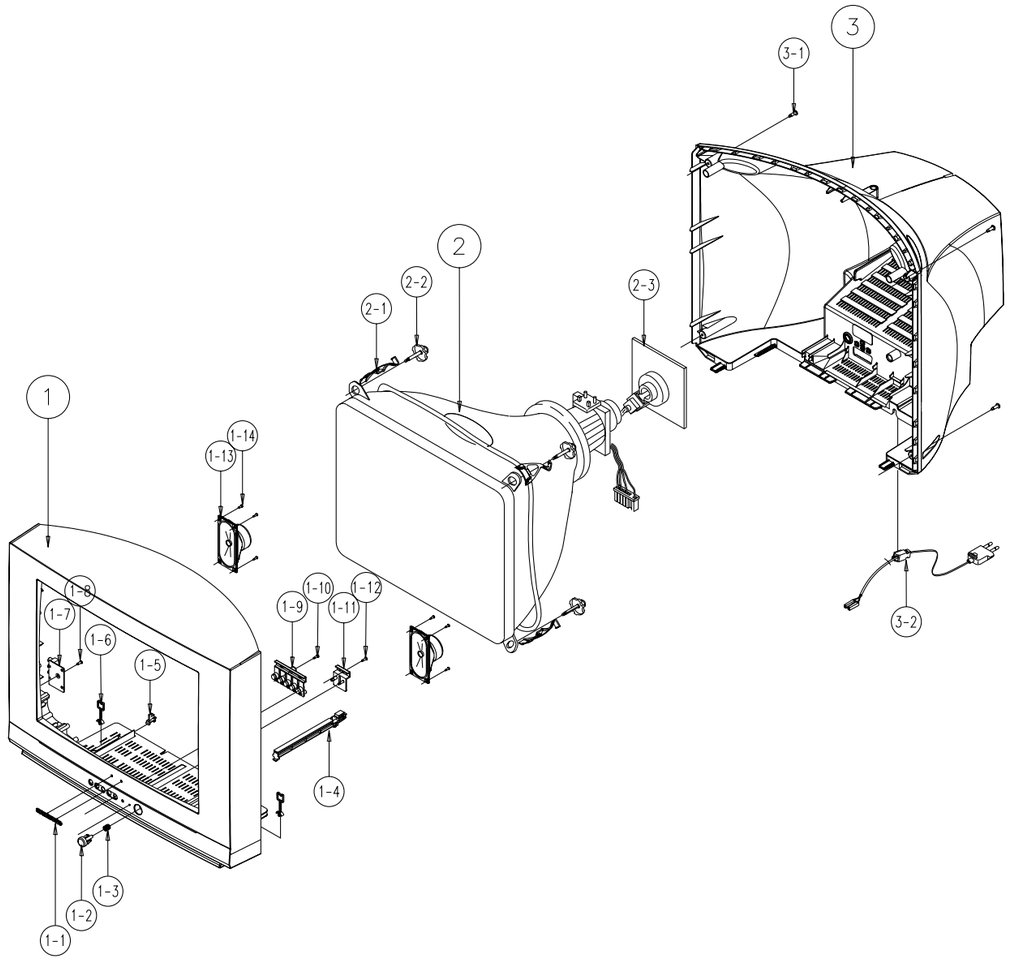

No	Code No	Description	Specification	Q'ty	Remark	S.N.A
1	AA96-01168A	ASSY C.P-FRONT;20H4,HIPS HB		1		
1*	AA64-03231A	CABINET-FRONT;20H4,HIPS,HB		1		
1-1	AA64-70010B	BADGE-BRAND;-,AL,-,-,L50,-,SILVER,SS R20		1		
1-2	AA64-03233B	KNOB-POWER;20H4,21H4,ABS,HB,NO-SILK		1		
1-3	AA61-60003J	SPRING ETC-CS;-,SUS304,-,-,OD6,N7,OD6,-,		1		
1-4	HA61-00721B	HOLDER-RAIL;21F5,HIPS,HB,GRY		1		
1-5		STOPPER-PCB;501H,HIPS,-,-,HB,NTR,-		1		
1-6	AA65-30018A	CLAMPER CORE-WIRE;DONG-A,NYLON-66,-,-,-,		1		
1-7	AA95-03104A	ASSY ETC-A/V SIDE;,21D8,KS1A		1		
1-8	6003-001024	SCREW-TAPTITE;RWH,+,B,M4,L12,ZPC(YEL),SW		1	CR+AV	
1-9	AA64-03235A	KNOB-CONTROL;20H4,ABS,HB		1		
1-10	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR		1	KC+CF	
1-11	AA64-03237A	WINDOW-RMC,LED;20H4,ACRYL,CLR		1		
1-12	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR		1	WR+CF	
1-13	3001-000274	SPEAKER;5W,8OHM,90DB,160HZ		2		
1-14	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR		8	SPK +C	
2	AA94-05857A	ASSY CRT;A48JLL90X02(W),450MG,20,ITC,O		1		
2-1	AA65-30107A	CLAMPER CORE-D,COIL;20~22 INCH,NYLON 66,		4		
2-2		SCREW-ASSY				
2-3	3704-001089	SOCKET-CRT;7P,22.5PI,12PI,SN,-		1	V999S	
3	AA64-02904A	CABINET BACK;20H4(SEH),HIPS,HB		1		
3-1	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR		4	CF+CB	
3-2	AA96-01126A	ASSY POWER CORD;DP,AA39-10001G,CP2,H/C25		1		